


1. Shape & Dimensions (mm)



2. Electrical Properties

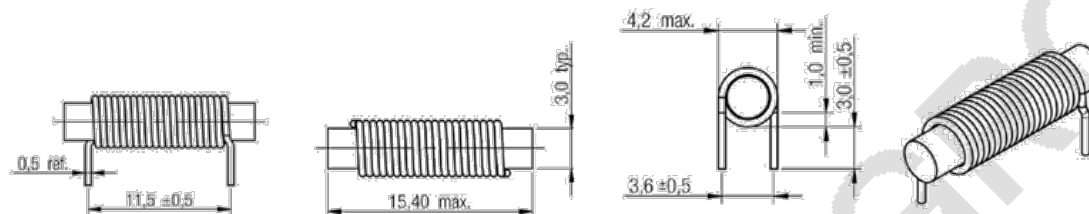

Part Number	Inductance (uH)	Inductance Tolerance	D.C.R. (Max mΩ) @ 25°C	Rated Current (Max A)
PVT-MDDR0415-6RON	6	±25%	26.4	2.5

Remarks:

- A. It is recommended that the temperature of the part does not exceed +125°C under worst case conditions.
 - a. Operating temperature: -40°C to +125°C
 - b. Storage temperature (on original package): <40°C; 75% RH max.
- B. Inductance: 4.7uH~10uH @ 10KHz/5mA
DCR: 24mΩ~80mΩ Max.

3. Typical Impedance Characteristics

